

## Specification

Model	LED40HM
Pick up Element	1/3"CMOS
Horizontal Resolution	700TV Line
Minimum Illumination	0.001Lux/F1.2
S/N Ratio	More than 46dB
Scanning System	2:1 interface
Synchronous System	Internal, Negative sync.
Auto Electronic Shutter	NTSC: 1/60s~1/100,000s, PAL: 1/50s~1/100,000s
Gamma Characteristic	0.45
IR Distance	40 Meters (with $\phi$ 5X42PCS Infrared LED)
IR Status	Under 10Lux by CDS
IR Power On	CDS AUTO Control
Video Output	1Vpp, 75 $\Omega$
Auto Gain Control	Auto
Power/Current	DC12V (+/-10%)/500mA
Lens	2.8-12mm Manual Zoom Lens
Dimension (mm)	295(W) x105(H) x95(D)
Weight (g)	1600
Storage Temperature	-30~+60 $^{\circ}$ C RH95% MAX
Operating Temperature	-10~+50 $^{\circ}$ C RH95% MAX


## Packing List

No	Name	Model	Number
1.	Weatherproof IR Color Camera	LED40HM	1
2.	User Guide	LED40HM	1

## Franchiser:

## LED40HM Color Camera

### Weatherproof IR Color Camera

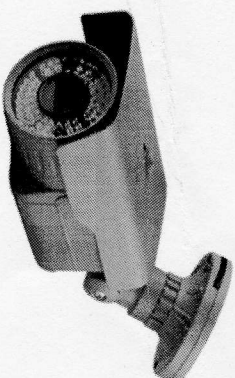

**Notes:** Before providing power for the camera, please read this User Guide in detail!

Do not attempt to disassemble the camera. If the camera can not work, please contact local franchiser or our company.